

## SPIROR FW 1300

Fully automatic rotating ring machine for packaging roofing panels, furniture, flatpacks, cabinets, doors, windows and other long and bulky, unpalletised products.





Maximum rotation speed 85 rpm.

### TECHNICAL SPECIFICATIONS

	A		C		C		D				
SPIROR	mm	inch	mm	inch	mm	inch	mm	inch	Kg	lbs	Max rotation speed
FW 1300	2795	110"	2550	100"	2635	104"	950±50	38"±2"	1.500	3.400	85 rpm

### LAYOUT

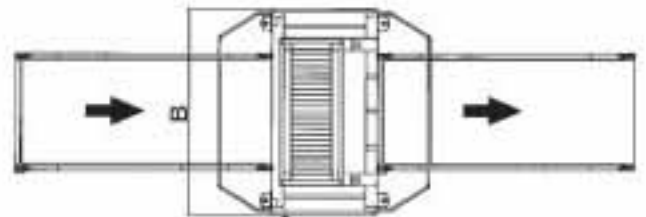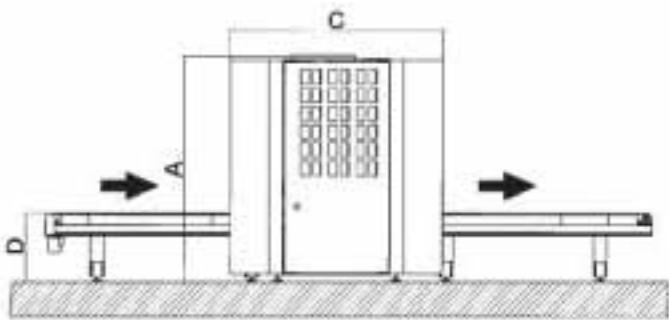

### STRETCH-FILM USABLE


Outer spool diameter	max 250 mm. (10")
Spool core diameter	76 mm. (3")
Spool width	250 / 500 mm. (10" / 20")
Film width	17 / 35 µm

### STRETCH-FILM USABLE

Technical drawings of this machine are available ON REQUEST.

## DIMENSIONS

Dimensions of the products to wrap

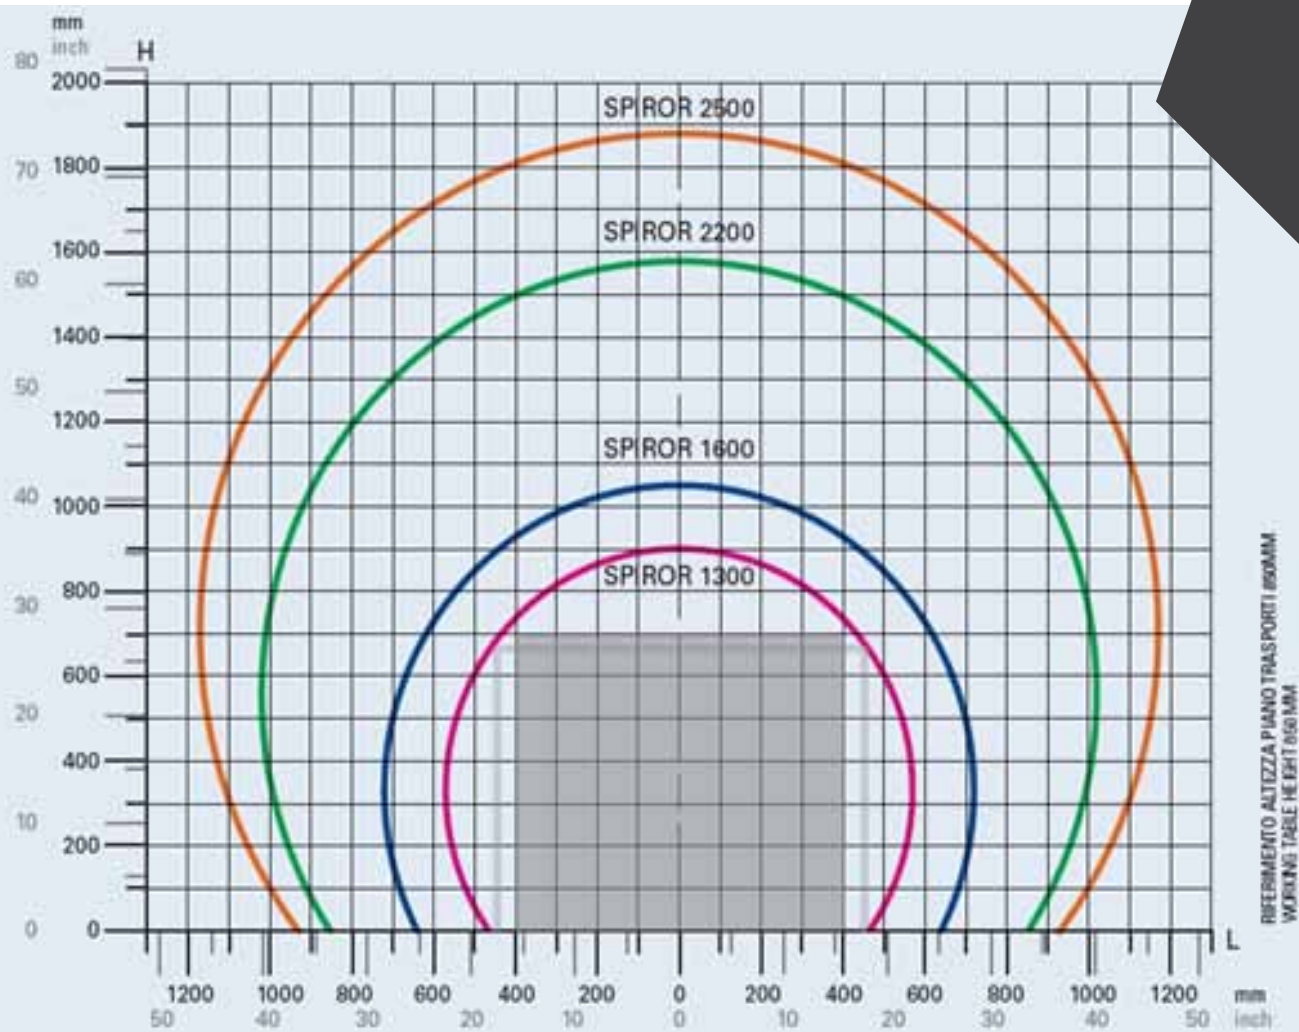

La sagoma del prodotto da avvolgere deve essere all'interno dell'arco di circonferenza come da esempio  
 The shape of the product to be wrapped must be within the arc of the circle as in the upper example.

LE CARATTERISTICHE TECNICHE POSSONO VARIARE SENZA PREAVVISO. - TECHNICAL SPECIFICATIONS MAY VARY WITHOUT PRIOR NOTICE.