

## SPIROR FW 1600

Fully automatic rotating ring machine for packaging roofing panels, furniture, flatpicks, cabinets, doors, windows and other long and bulky, unpalleted products.





Maximum rotation speed 75 rpm.

### TECHNICAL SPECIFICATIONS

|         | A    |      | C    |      | C    |      | D      |        |       |       |                    |
|---------|------|------|------|------|------|------|--------|--------|-------|-------|--------------------|
| SPIROR  | mm   | inch | mm   | inch | mm   | inch | mm     | inch   | Kg    | lbs   | Max rotation speed |
| FW 1600 | 2795 | 110" | 2550 | 100" | 2635 | 104" | 950±50 | 38"±2" | 1.500 | 3.400 | 75 rpm             |

### LAYOUT

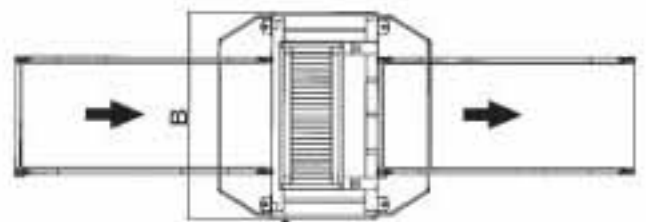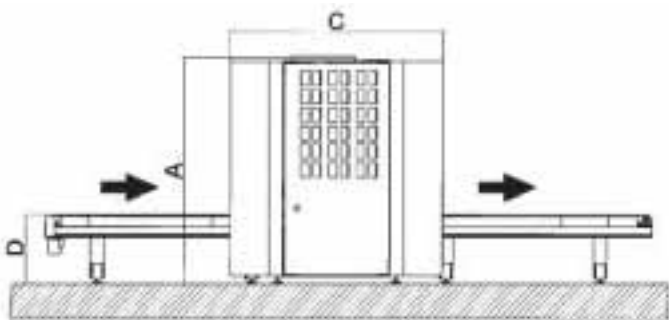

### STRETCH-FILM USABLE


|                      |                           |
|----------------------|---------------------------|
| Outer spool diameter | max 250 mm. (10")         |
| Spool core diameter  | 76 mm. (3")               |
| Spool width          | 250 / 500 mm. (10" / 20") |
| Film width           | 17 / 35 µm                |

### STRETCH-FILM USABLE

Technical drawings of this machine are available ON REQUEST.

## DIMENSIONS

Dimensions of the products to wrap

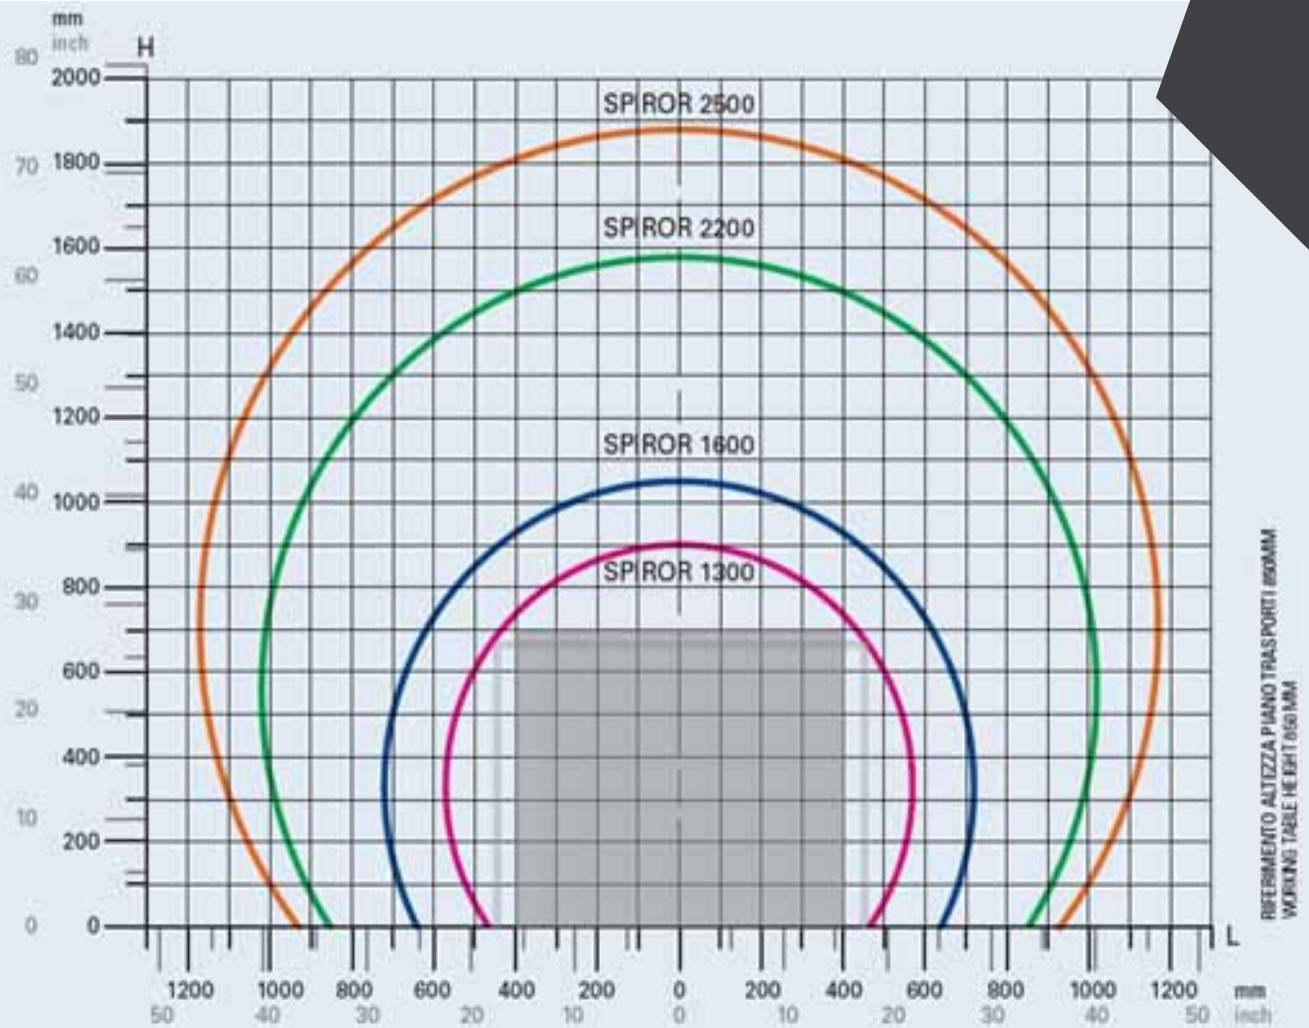

La sagoma del prodotto da avvolgere deve essere all'interno dell'arco di circonferenza come da esempio  
 The shape of the product to be wrapped must be within the arc of the circle as in the upper example.

LE CARATTERISTICHE TECNICHE POSSONO VARIARE SENZA PREAVVISO. - TECHNICAL SPECIFICATIONS MAY VARY WITHOUT PRIOR NOTICE.