



Fully Automatic Models

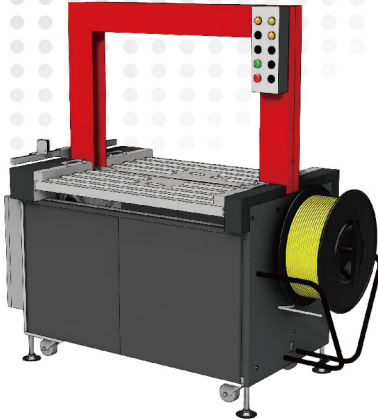

PW-0860AS2R

- Options**
- Detection for strap not in position
 - Detection for no strap
 - Stainless steel structure SUS #304
 - Single phase (1Ø)

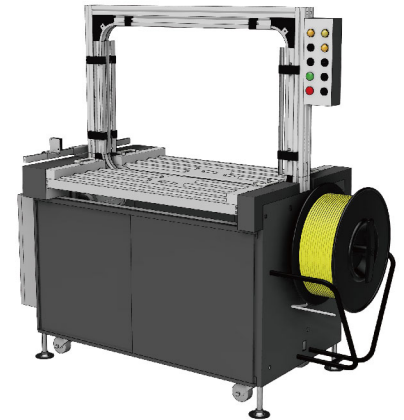


PW-0860CS2R

PW-0860AS2R/ PW-0860CS2R Fully Automatic Strapping Machine

AS2R: Roller Table Drive + 2 Sensors with Steel Arch


CS2R: Roller Table Drive + 2 Sensors with Aluminum Arch

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 850 x H 600 mm (other sizes made on request)
Strapping Size (Min.)	L 350 x W 400 x H 30 mm
Strap Width	9, 12, 15, 19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Max.Loading Weight	100 Kgs
Working Height	810 mm
Machine Size	L 1595 x W 760 x H 1535 mm

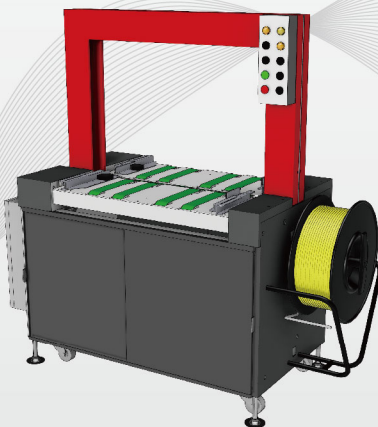

PW-0860AS2B

- Options**
- Detection for strap not in position
 - Detection for no strap
 - Stainless steel structure SUS #304
 - Single phase (1Ø)

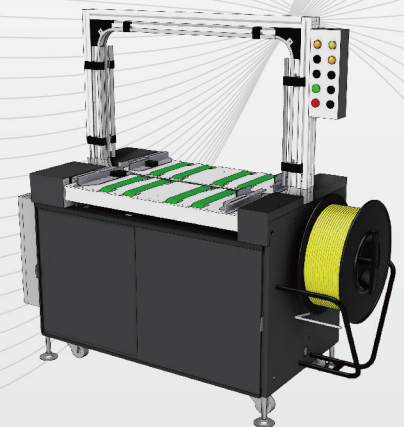

PW-0860CS2B

PW-0860AS2B/ PW-0860CS2B Fully Automatic Strapping Machine

AS2B: Belt Table Drive + 2 Sensors with Steel Arch

CS2B: Belt Table Drive + 2 Sensors with Aluminum Arch

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 850 x H 600 mm (other sizes made on request)
Strapping Size (Min.)	L 200 x W 200 x H 30 mm
Strap Width	9, 12, 15, 19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Max.Loading Weight	20 Kgs
Working Height	810 mm
Machine Size	L 1595 x W 700 x H 1535 mm